



**Answer Form**  
**Experimental Problem No. 1**  
**Diode laser wavelength**

**Task 1.1 Experimental setup.**

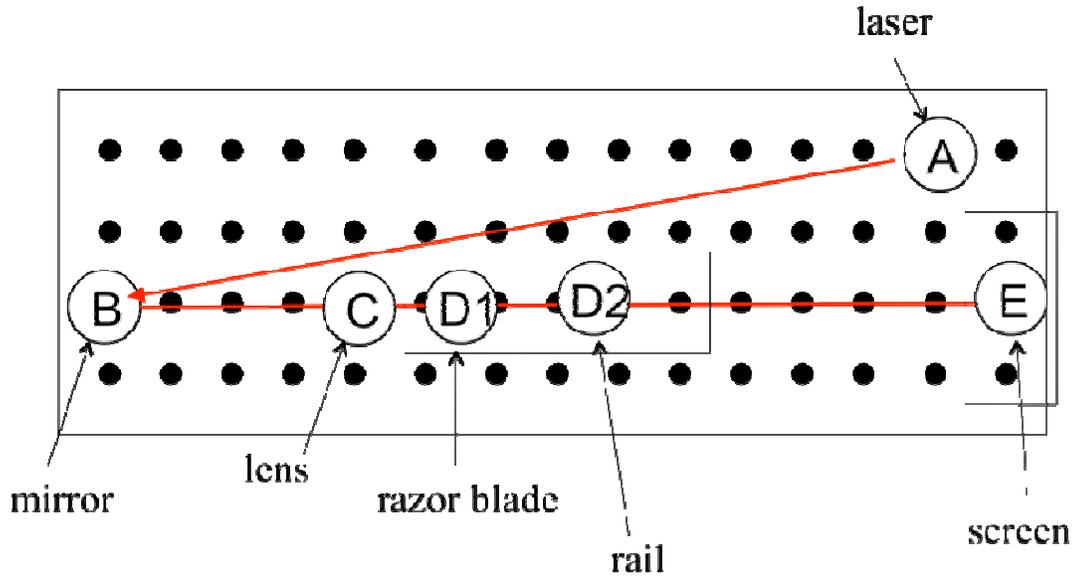

(0.75)

1.1	Sketch the laser path in drawing of Task 1.1 and Write down the height $h$ of the beam as measured from the table	1.0
	$h \pm \Delta h = (5.0 \pm 0.05) \times 10^{-2} \text{ m}$ (0.25)	

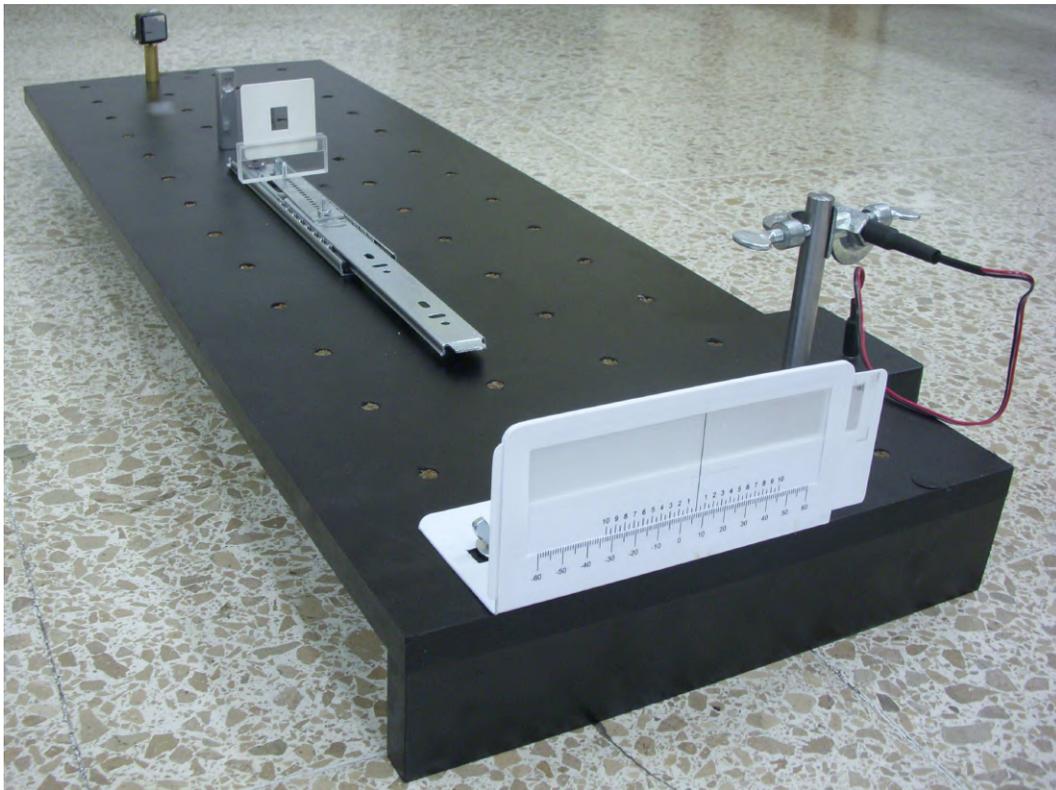

**Experimental setup for measurement of diode laser wavelength  
Task 1.2 Expressions for optical path differences.**

1.2	<p>The path differences are</p> <p>Case I: (0.25)</p> $\Delta_I(n) = (BF + FP) - BP = (L_b - L_0) + \sqrt{L_0^2 + L_R^2(n)} - \sqrt{L_b^2 + L_R^2(n)}$ $= (L_b - L_0) + L_0 \sqrt{1 + \frac{L_R^2(n)}{L_0^2}} - L_b \sqrt{1 + \frac{L_R^2(n)}{L_b^2}}$ <p>using <math>\sqrt{1+x} \approx 1 + \frac{1}{2}x</math></p> $\approx (L_b - L_0) + L_0 \left(1 + \frac{1}{2} \frac{L_R^2(n)}{L_0^2}\right) - L_b \left(1 + \frac{1}{2} \frac{L_R^2(n)}{L_b^2}\right)$ $\Rightarrow \Delta_I(n) \approx \frac{1}{2} L_R^2(n) \left(\frac{1}{L_0} - \frac{1}{L_b}\right)$ <p>Case II: (0.25)</p> $\Delta_{II}(n) = (FB + BP) - FP = (L_0 - L_a) + \sqrt{L_a^2 + L_L^2(n)} - \sqrt{L_0^2 + L_L^2(n)}$ $\approx (L_0 - L_a) + L_a \sqrt{1 + \frac{L_L^2(n)}{L_a^2}} - L_0 \sqrt{1 + \frac{L_L^2(n)}{L_0^2}}$ <p>using <math>\sqrt{1+x} \approx 1 + \frac{1}{2}x</math></p> $\approx (L_0 - L_a) + L_a \left(1 + \frac{1}{2} \frac{L_L^2(n)}{L_a^2}\right) - L_0 \left(1 + \frac{1}{2} \frac{L_L^2(n)}{L_0^2}\right)$ $\Rightarrow \Delta_{II}(n) \approx \frac{1}{2} L_L^2(n) \left(\frac{1}{L_a} - \frac{1}{L_0}\right)$	0.5
-----	--	-----

**Task 1.3 Measuring the dark fringe positions and locations of the blade.** Use additional sheets if necessary.

**TABLE I**


$n$	$(l_R(n) \pm 0.1) \times 10^{-3}$ m	$(l_L(n) \pm 0.1) \times 10^{-3}$ m	$x_R$	$x_L$
0	-7.5	1.1	0.791	0.935
1	-10.1	3.7	1.275	1.369
2	-12.4	6.4	1.620	1.696
3	-14.0	8.2	1.903	1.968
4	-15.6	10.0	2.151	2.208
5	-17.2	11.4	2.372	2.424
6	-18.4	12.2	2.574	2.622
7	-19.7		2.761	
8	-20.7		2.937	
9	-22.0		3.102	
10	-23.0		3.260	
11	-24.1		3.410	

1.3	<p>Report positions of the blade and their difference with higher precision:</p> <p><math>L_b \pm \Delta L_b = (653 \pm 1) \times 10^{-3} \text{ m}</math> (0.25) LABEL (I) (measuring tape)</p> <p><math>L_a \pm \Delta L_a = (628 \pm 1) \times 10^{-3} \text{ m}</math> (0.25) LABEL (I) (measuring tape)</p> <p><math>d = L_b - L_a = (24.6 \pm 0.1) \times 10^{-3} \text{ m}</math> (0.25) LABEL (H) (caliper)</p>	3.25
-----	---	------

W

Student code	Page No.	Total No. of pages

$$x_R = \sqrt{n + \frac{5}{8}}$$

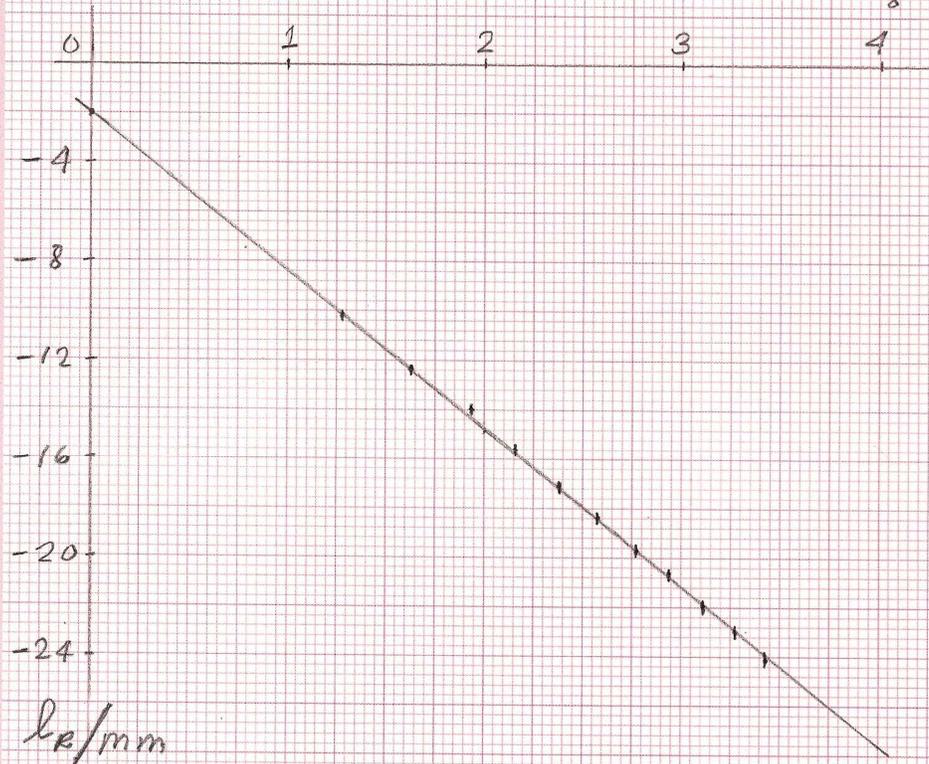


$$\text{fit } l_R = m_R x_R + l_{0R}$$

$$m_R = (-6.39 \pm 0.07) \times 10^{-3} \text{ m}$$

$$l_{0R} = (-2.06 \pm 0.17) \times 10^{-3} \text{ m}$$

W

Student code	Page No.	Total No. of pages

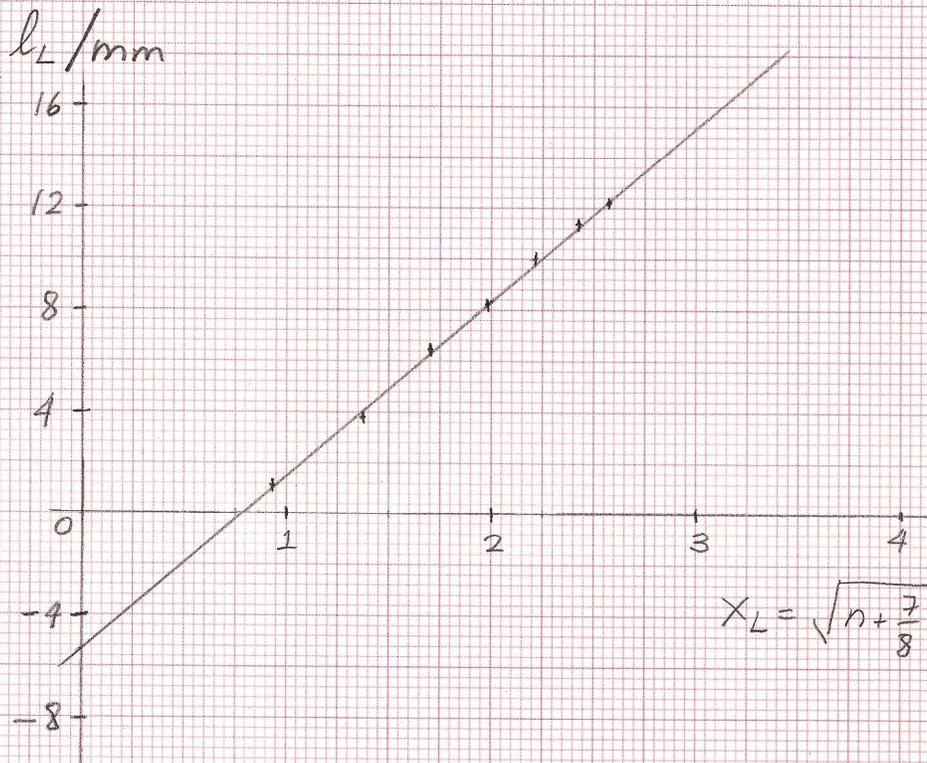

$$\text{fit } l_L = m_L X_L + l_{0L}$$

$$m_L = (6.83 \pm 0.19) \times 10^{-3} \text{ m}$$

$$l_{0L} = (-5.33 \pm 0.36) \times 10^{-3} \text{ m}$$

Task 1.4 Performing a statistical and graphical analysis.

From the condition of dark fringes and Task 1.2, we have

$$\frac{1}{2}L_R^2(n)\left(\frac{1}{L_0} - \frac{1}{L_b}\right) = \left(n + \frac{5}{8}\right)\lambda$$

and

$$\frac{1}{2}L_L^2(n)\left(\frac{1}{L_a} - \frac{1}{L_0}\right) = \left(n + \frac{7}{8}\right)\lambda$$

Using (1.5),  $L_R(n) = l_R(n) - l_{0R}$  and  $L_L(n) = l_L(n) - l_{0L}$  we can rewrite

$$\frac{1}{2}(l_R(n) - l_{0R})^2\left(\frac{1}{L_0} - \frac{1}{L_b}\right) = \left(n + \frac{5}{8}\right)\lambda$$

$$\Rightarrow l_R(n) = \sqrt{\frac{2L_bL_0}{L_b - L_0}}\lambda\sqrt{n + \frac{5}{8}} + l_{0R}$$

and

$$\frac{1}{2}(l_L(n) - l_{0L})^2\left(\frac{1}{L_a} - \frac{1}{L_0}\right) = \left(n + \frac{7}{8}\right)\lambda$$

$$\Rightarrow l_L(n) = \sqrt{\frac{2L_aL_0}{L_0 - L_a}}\lambda\sqrt{n + \frac{7}{8}} + l_{0L}$$

These can be cast as equations of a straight line,  $y = mx + b$ .

Case I:

$$y_R = l_R \quad x_R = \sqrt{n + \frac{5}{8}} \quad m_R = \sqrt{\frac{2L_bL_0}{L_b - L_0}}\lambda \quad b_R = l_{0R}$$

Case II:

$$y_L = l_L \quad x_L = \sqrt{n + \frac{7}{8}} \quad m_L = \sqrt{\frac{2L_aL_0}{L_0 - L_a}}\lambda \quad b_L = l_{0L}$$

Perform least squares analysis of above equations. In Table I, we write down the values  $x_R$  and  $x_L$ .

One finds:

$$m_R \pm \Delta m_R = (-6.39 \pm 0.07) \times 10^{-3} \text{ m}$$

	<p><math>m_L \pm \Delta m_L = (6.83 \pm 0.19) \times 10^{-3} \text{ m}</math></p> <p>and (values of <math>l_{0R}</math> and <math>l_{0L}</math>)</p> <p><math>l_{0R} \pm \Delta l_{0R} = b_R \pm \Delta b_R = (-2.06 \pm 0.17) \times 10^{-3} \text{ m}</math></p> <p><math>l_{0L} \pm \Delta l_{0L} = b_L \pm \Delta b_L = (-5.33 \pm 0.36) \times 10^{-3} \text{ m}</math></p> <p>The equations used in the least squares analysis:</p> $m = \frac{N \sum_{n=1}^N x_n y_n - \sum_{n=1}^N x_n \sum_{n'=1}^N y_{n'}}{\Delta}$ $b = \frac{\sum_{n=1}^N x_n^2 \sum_{n'=1}^N y_{n'} - \sum_{n=1}^N x_n \sum_{n'=1}^N x_{n'} y_{n'}}{\Delta}$ <p>where</p> $\Delta = N \sum_{n=1}^N x_n^2 - \left( \sum_{n=1}^N x_n \right)^2$ <p>with <math>N</math> the number of data points. The uncertainty is calculated as</p> $(\Delta m)^2 = N \frac{\sigma^2}{\Delta} \quad , \quad (\Delta b)^2 = \frac{\sigma^2}{\Delta} \sum_{n=1}^N x_n^2 \quad \text{with,}$ $\sigma^2 = \frac{1}{N-2} \sum_{n=1}^N (y_n - b - m x_n)^2$ <p>REFERENCE: P.R. Bevington, <i>Data Reduction and Error Analysis for the Physical Sciences</i>, McGraw-Hill, 1969.</p>	
--	--	--

**Task 1.5 Calculating  $\lambda$ .**

1.5	<p>From any slope and the value of <math>L_0</math> one finds,</p> $\lambda = \frac{L_b - L_a}{2L_a L_b} \frac{m_R^2 m_L^2}{m_R^2 + m_L^2}$ <p>Using the suggestion to replace <math>d = L_b - L_a</math>, we can write</p>	2.0
-----	---	-----

$$\lambda = \frac{d}{2L_a L_b} \frac{m_R^2 m_L^2}{m_R^2 + m_L^2}$$

$$\lambda \pm \Delta\lambda = (663 \pm 25) \times 10^{-9} \text{ m}$$

The uncertainty may range from 15 to 30 nanometers.

A precise measurement of the wavelength is  $\lambda \pm \Delta\lambda = (655 \pm 1) \times 10^{-9} \text{ m}$ .

The formula for the uncertainty,

$$\Delta\lambda = \sqrt{\left(\frac{\partial\lambda}{\partial d}\right)^2 \Delta d^2 + \left(\frac{\partial\lambda}{\partial L_a}\right)^2 \Delta L_a^2 + \left(\frac{\partial\lambda}{\partial L_b}\right)^2 \Delta L_b^2 + \left(\frac{\partial\lambda}{\partial m_R}\right)^2 \Delta m_R^2 + \left(\frac{\partial\lambda}{\partial m_L}\right)^2 \Delta m_L^2}$$

one finds,

$$\frac{\partial\lambda}{\partial d} = \frac{\lambda}{d}, \quad \frac{\partial\lambda}{\partial L_b} = \frac{\lambda}{L_b}, \quad \frac{\partial\lambda}{\partial L_a} = \frac{\lambda}{L_a} \quad \text{and} \quad \frac{\partial\lambda}{\partial m_R} = \frac{2m_L^2}{m_R} \frac{\lambda}{m_L^2 + m_R^2}$$

and analogously for the other slope.


One can calculate directly these quantities. However, one may note that the errors due to  $L_a$ ,  $L_b$  and  $d$  are negligible. Moreover,  $m_R^2 \approx m_L^2$  and  $L_a \approx L_b$ . This implies,

$$\frac{\partial\lambda}{\partial m_R} \approx \frac{\lambda}{m_R} \approx \frac{\partial\lambda}{\partial m_L}. \quad \text{Thus,}$$


$$\Delta\lambda \approx \sqrt{2} \frac{\lambda}{m_L} \Delta m_L \approx (25 \times 10^{-9}) \text{ m}$$

**Answer Form**  
**Experimental Problem No. 2**  
**Birefringence of mica**


Task 2.1 a) Experimental setup for  $I_p$ . (0.5 points)

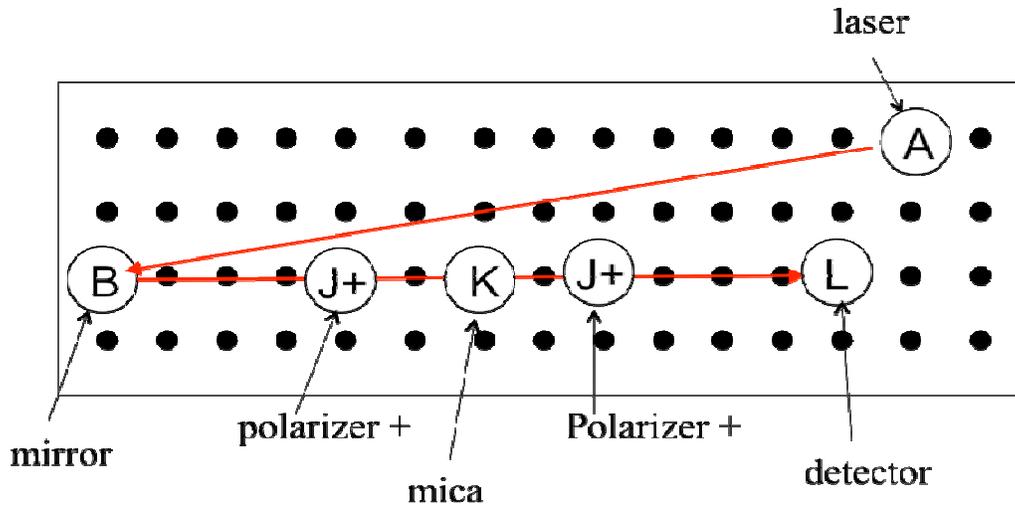

Task 2.1 b) Experimental setup for  $I_o$ . (0.5 points)

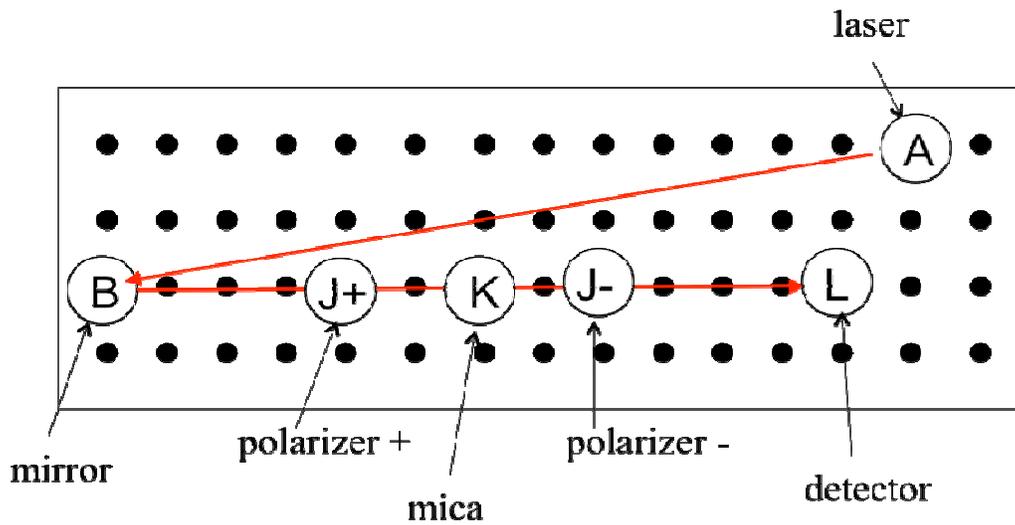

2.1		1.0
-----	--	-----

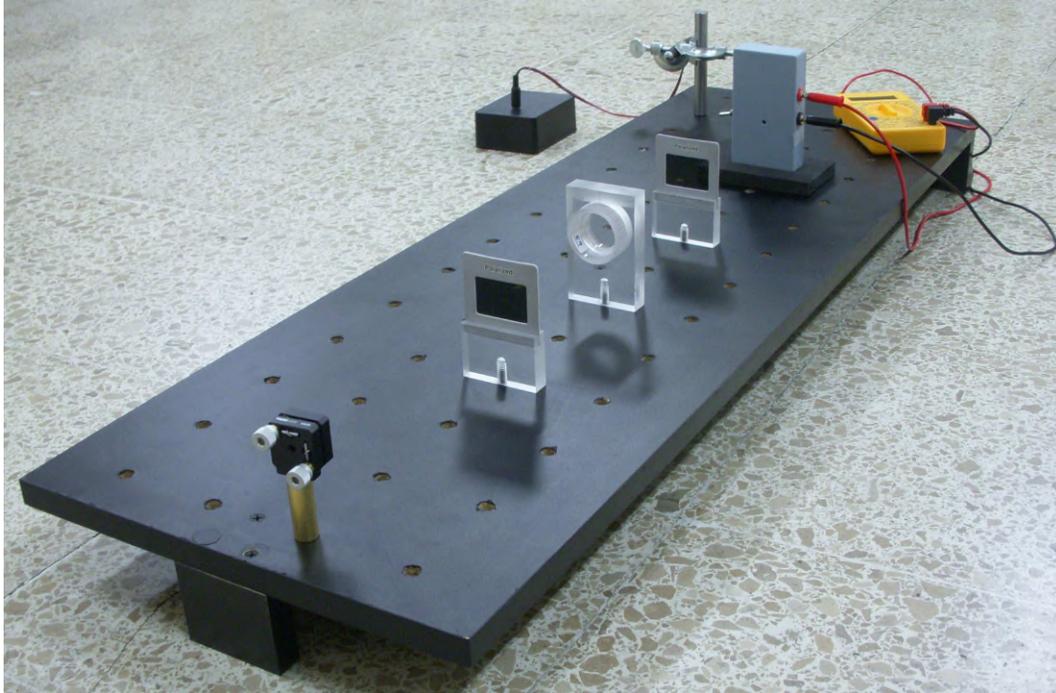

**Experimental setup for measurement of mica birefringence**

**Task 2.2 The scale for angles.**


2.2	The angle between two consecutive black lines is $\theta_{\text{int}} = 3.6$ degrees because there are 100 lines.	0.25
-----	--	------

**Tasks 2.3 Measuring  $I_p$  and  $I_o$  .Use additional sheets if necessary.**

**TABLE I (3 points)**

$\bar{\theta}$ (degrees)	$(I_p \pm 1) \times 10^{-3}$ V	$(I_o \pm 1) \times 10^{-3}$ V
-3.6	46.4	1.1
0	48.1	0.2
3.6	47.0	0.6
7.2	46.0	2.0
10.8	42.3	4.9
14.4	38.2	9.0
18.0	33.9	12.5

21.6	27.7	17.9
25.2	23.4	22.0
28.8	17.8	27.0
32.4	12.5	31.7
36.0	8.8	34.8
39.6	5.2	38.0
43.2	3.6	39.4
46.8	3.2	39.6
50.4	4.5	38.7
54.0	6.9	36.6
57.6	10.3	33.6
61.2	14.7	29.4
64.8	20.1	24.7
68.4	25.4	19.7
72.0	30.5	14.7
75.6	36.6	10.2
79.2	40.7	6.1
82.8	44.3	3.2
86.4	46.9	1.0
90.0	47.8	0.2
93.6	47.0	0.4
97.2	45.7	2.0

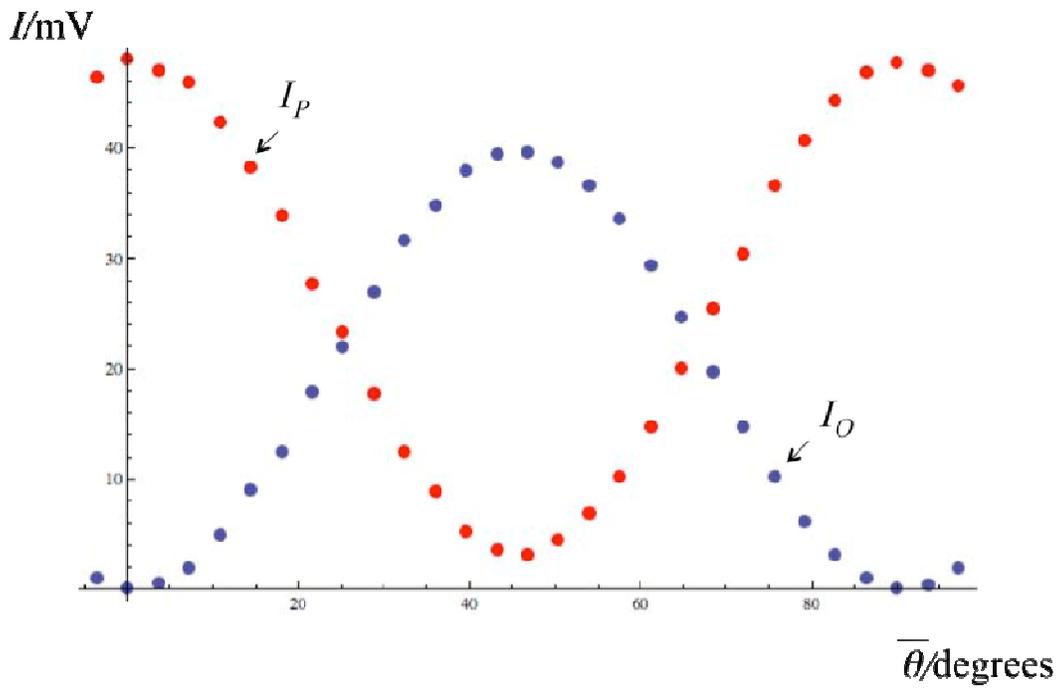

Parallel  $I_p$  and perpendicular  $I_o$  intensities vs angle  $\bar{\theta}$ .

**GRAPH NOT REQUIRED!**

**Task 2.4 Finding an appropriate zero for  $\theta$ .**

2.4

a) *Graphical analysis*

1.0

The value for the shift is  $\delta\bar{\theta} = -1.0$  degrees.

Add the graph paper with the analysis of this Task.

b) *Numerical analysis*

From Table I choose the first three points of  $\bar{\theta}$  and  $I_o(\bar{\theta})$ :  
(intensities in millivolts)

$$(x_1, y_1) = (-3.6, 1.1) \quad (x_2, y_2) = (0, 0.2) \quad (x_3, y_3) = (3.6, 0.6)$$

We want to fit  $y = ax^2 + bx + c$ . This gives three equations:

$$1.1 = a(3.6)^2 - b(3.6) + c$$

$$0.2 = c$$

$$0.6 = a(3.6)^2 + b(3.6) + c$$

$$\text{second in first} \Rightarrow b = \frac{-0.9 + a(3.6)^2}{3.6}$$

$$\text{in third} \Rightarrow 0.6 = a((3.6)^2 + (3.6)^2) - 0.9 + 0.2$$

$$\Rightarrow a = 0.050 \quad b = -0.069$$


The minimum of the parabola is at:

$$\bar{\theta}_{\min} = -\frac{b}{2a} \approx 0.7 \text{ degrees}$$

Therefore,  $\delta\bar{\theta} = -0.7$  degrees.

W

Student code	Page No.	Total No. of pages

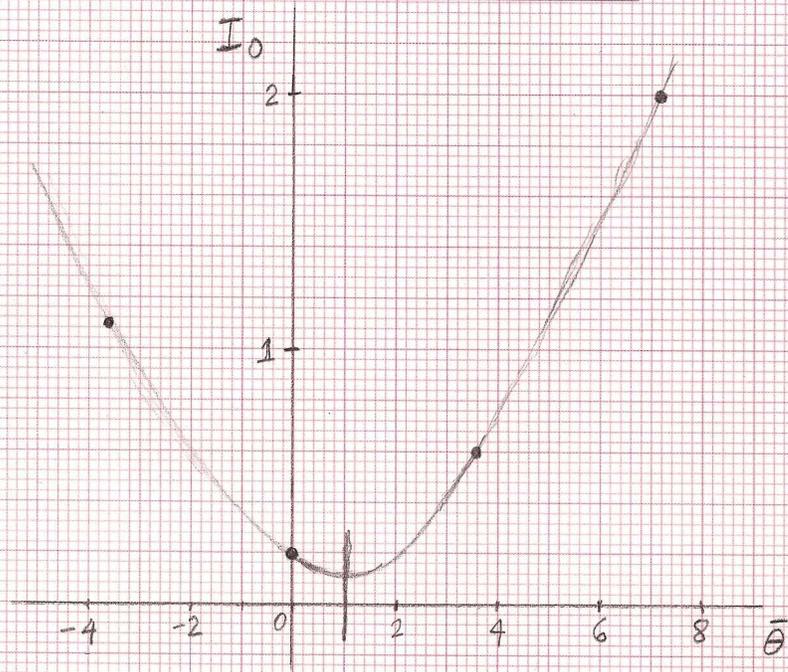

$\bar{\theta}_{\min} \approx 1.0$  degrees

4 points

$\bar{\theta}$	$(I_0/mV)$
-3.6	1.1
0.0	0.2
3.6	0.6
7.2	2.0

**Task 2.5** Choosing the appropriate variables.

2.5	<p>Equation (2.4) for the perpendicular intensity is</p> $\bar{I}_o(\theta) = \frac{1}{2}(1 - \cos\Delta\phi)\sin^2(2\theta)$ <p>This can be cast as a straight line <math>y = mx + b</math>, with</p> $y = \bar{I}_o(\theta) \quad , \quad x = \sin^2(2\theta) \quad \text{and} \quad m = \frac{1}{2}(1 - \cos\Delta\phi)$ <p>from which the phase may be obtained.</p> <p><b>NOTE:</b> This is not the only way to obtain the phase difference. One may, for instance, analyze the 4 maxima of either <math>\bar{I}_p(\theta)</math> or <math>\bar{I}_o(\theta)</math>.</p>	0.5
-----	---	-----

**Task 2.6 Statistical analysis and the phase difference.**

2.6	<p>To perform the statistical analysis, we shall then use</p> $y = \bar{I}_o(\theta) \quad \text{and} \quad x = \sin^2(2\theta) \quad .$	1.0
-----	--	-----

	<p>Since for <math>\theta: 0 \rightarrow \frac{\pi}{4}</math>, <math>x: 0 \rightarrow 1</math>, we use only 12 pairs of data points to cover this range, as given in Table II.</p> <p><math>x</math> may be left without uncertainty since it is a setting. The uncertainty in <math>y</math> may be calculated as</p> $\Delta \bar{I}_o = \sqrt{\left(\frac{\partial \bar{I}_o}{\partial I_o}\right)^2 \Delta I_o^2 + \left(\frac{\partial \bar{I}_o}{\partial I_p}\right)^2 \Delta I_p^2}$ <p>and one gets</p> $\Delta \bar{I}_o = \frac{\sqrt{I_o^2 + I_p^2}}{(I_o + I_p)^2} \Delta I_o \approx 0.018, \text{ approximately the same for all values.}$	
--	---	--

**TABLE II**

$\bar{\theta}$ (degrees)	$x = \sin^2(2\theta)$	$y = \bar{I}_o \pm 0.018$
2.9	0.010	0.013
6.5	0.051	0.042
10.1	0.119	0.104
13.7	0.212	0.191
17.3	0.322	0.269
20.9	0.444	0.392
24.5	0.569	0.484
28.1	0.690	0.603
31.7	0.799	0.717
35.3	0.890	0.798
38.9	0.955	0.880
42.5	0.992	0.916

2.6	<p>We now perform a least square analysis for the variables <math>y</math> vs <math>x</math> in Table II. The slope and <math>y</math>-intercept are:</p> $m \pm \Delta m = 0.913 \pm 0.012$ $b \pm \Delta b = -0.010 \pm 0.008$ <p>The formulas for this analysis are:</p>	1.75
-----	---	------

$$m = \frac{N \sum_{n=1}^N x_n y_n - \sum_{n=1}^N x_n \sum_{n'=1}^N y_{n'}}{\Delta}$$

$$b = \frac{\sum_{n=1}^N x_n^2 \sum_{n'=1}^N y_{n'} - \sum_{n=1}^N x_n \sum_{n'=1}^N x_{n'} y_{n'}}{\Delta}$$

where

$$\Delta = N \sum_{n=1}^N x_n^2 - \left( \sum_{n=1}^N x_n \right)^2$$

with  $N$  the number of data points.

The uncertainty is calculated as

$$(\Delta m)^2 = N \frac{\sigma^2}{\Delta} \quad , \quad (\Delta b)^2 = \frac{\sigma^2}{\Delta} \sum_{n=1}^N x_n^2 \quad \text{with,}$$

$$\sigma^2 = \frac{1}{N-2} \sum_{n=1}^N (y_n - b - m x_n)^2$$


with  $N = 12$  in this example.

**Include the accompanying plot or plots.**

Student code

Page No.

Total No. of pages

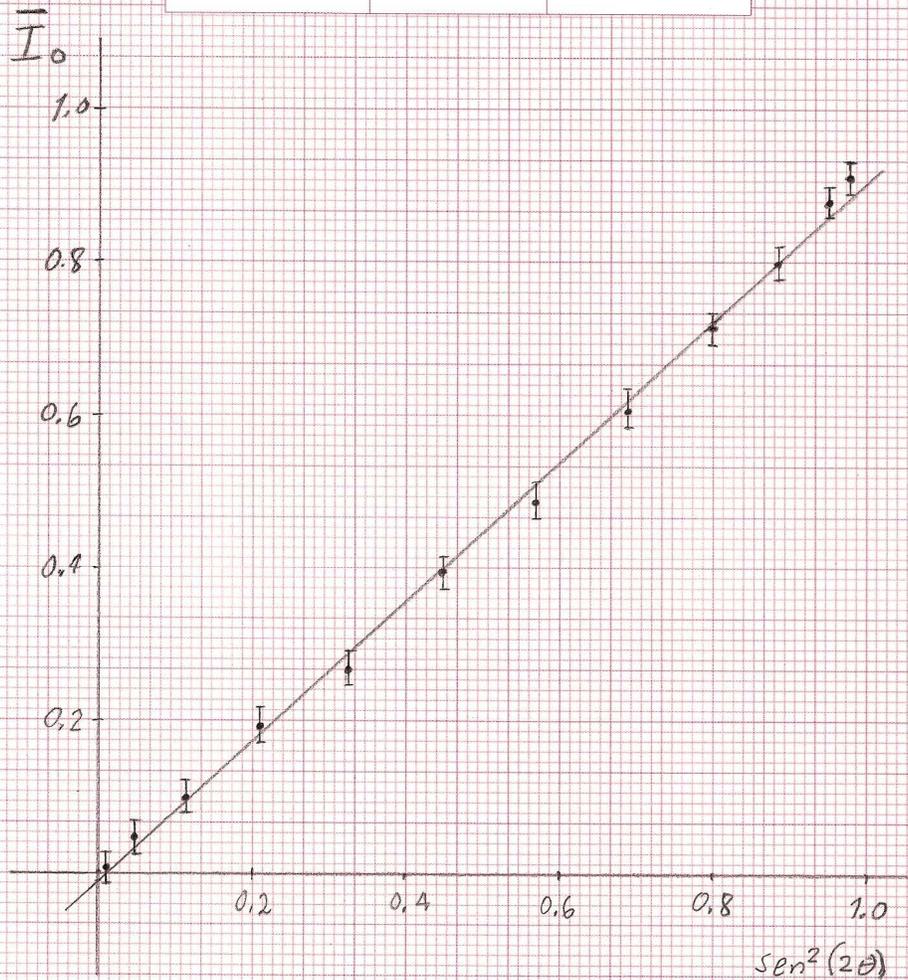

fit  $y = mx + b$

$$m = 0.913 \pm 0.012$$

$$b = -0.010 \pm 0.008$$

2.6 Calculate the value of the phase  $\Delta\phi$  in radians in the interval  $[0, \pi]$ .

0.5

From the slope  $m = \frac{1}{2}(1 - \cos\Delta\phi)$ , one finds

$$\Delta\phi \pm \Delta(\Delta\phi) = 2.54 \pm 0.04$$

Write down the formulas for the calculation of the uncertainty.

We see that,

	$\Delta m = \left  \frac{\partial m}{\partial \Delta \phi} \right  \Delta(\Delta \phi) = \frac{1}{2} \sin(\Delta \phi) \Delta(\Delta \phi), \text{ therefore, } \Delta(\Delta \phi) = \frac{2\Delta m}{\sin(\Delta \phi)}.$	
--	---	--

**Task 2.7 Calculating the birefringence  $|n_1 - n_2|$ .**

2.7	<p>Write down the width of the slab of mica you used,</p> $L \pm \Delta L = (100 \pm 1) \times 10^{-6} \text{ m}$ <p>Write down the wavelength you use,</p> $\lambda \pm \Delta \lambda = (663 \pm 25) \times 10^{-9} \text{ m (from Problem 1)}$ <p>Calculate the birefringence</p> $ n_1 - n_2  \pm \Delta  n_1 - n_2  = (3.94 \pm 0.16) \times 10^{-3}$ <p>The birefringence is between 0.003 and 0.005. Nominal value 0.004</p> <p>Write down the formulas you used for the calculation of the uncertainty of the birefringence.</p> <p>Since the width <math>L &gt; 82</math> micrometers, we use</p> $2\pi - \Delta \phi = \frac{2\pi L}{\lambda}  n_1 - n_2 $ <p>The error is</p> $\Delta  n_1 - n_2  = \sqrt{\left( \frac{\partial  n_1 - n_2 }{\partial \lambda} \right)^2 \Delta \lambda^2 + \left( \frac{\partial  n_1 - n_2 }{\partial L} \right)^2 \Delta L^2 + \left( \frac{\partial  n_1 - n_2 }{\partial \Delta \phi} \right)^2 \Delta(\Delta \phi)^2}$ $\Delta  n_1 - n_2  = \sqrt{\left( \frac{ n_1 - n_2 }{\lambda} \right)^2 \Delta \lambda^2 + \left( \frac{ n_1 - n_2 }{L} \right)^2 \Delta L^2 + \left( \frac{\lambda}{2\pi L} \right)^2 \Delta(\Delta \phi)^2}$	1.0
-----	---	-----

Since the data may appear somewhat disperse and/or the errors in the intensities may be large, a graphical analysis may be performed.

In the accompanying plot, it is exemplified a simple graphical analysis: first the main slope is found, then, using the largest deviations one can find two extreme slopes.

The final result is,

$$m = 0.91 \pm 0.08 \quad \text{and} \quad b = -0.01 \pm 0.04$$


The calculation of the birefringence and its uncertainty follows as before. One now finds,

$$|n_1 - n_2| \pm \Delta|n_1 - n_2| = (3.94 \pm 0.45) \times 10^{-3}.$$

A larger (more realistic) error.


W

Student code	Page No.	Total No. of pages

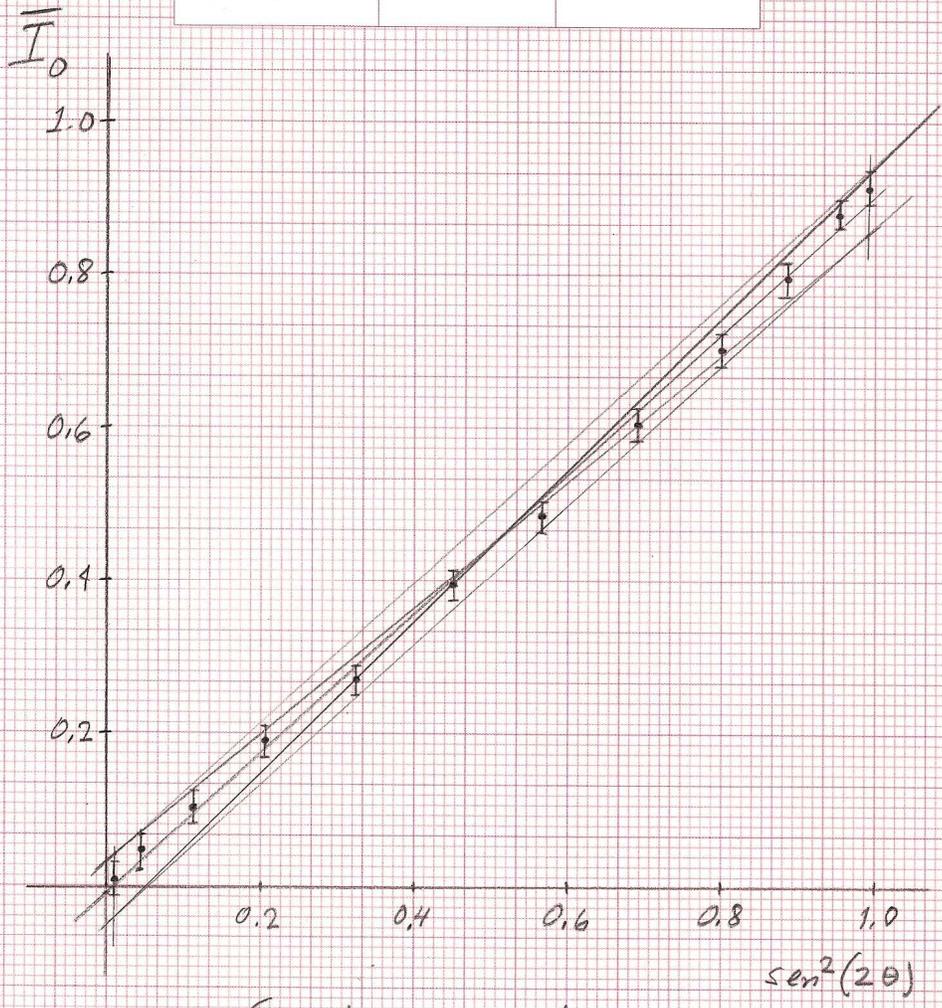

Graphical analysis

$m = 0.91 \pm 0.08$        $b = -0.01 \pm 0.04$

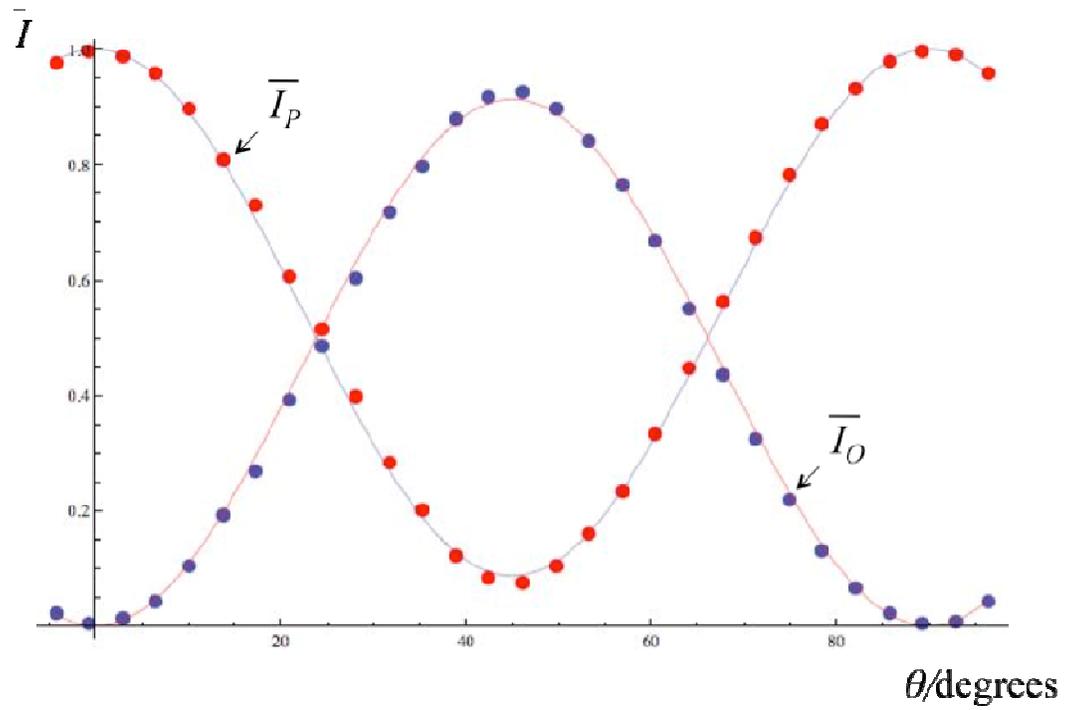

Comparison of experimental data (normalized intensities  $\bar{I}_p$  and  $\bar{I}_o$ ) with fitting (equations (2.3) and (2.4)) using the calculated value of the phase difference  $\Delta\phi$ .

**GRAPH NOT REQUIRED!**